
AL 3175Y

RECESSED LED WALL LIGHTING

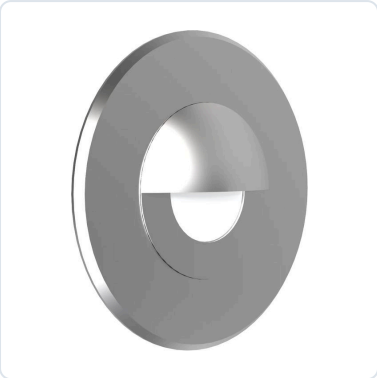

Garden Lighting › IP67 Wall-Recessed LED Lighting

The AL 3175Y is a compact IP67 wall-recessed LED luminaire for low-level orientation lighting on walls and along garden paths. Its AISI 316L stainless steel construction does not corrode, and the special glass and body are resistant to UV and impact. Three 5730 SMD LEDs with a power of 3W deliver 300 lumen in white, warm white or natural white; a blue version is also offered. Supply voltage is 12 VDC or 24 VDC.

PROTECTION RATING	IP67
OPERATING VOLTAGE	12 VDC · 24 VDC
POWER	3 W
ELECTRICAL CLASS	Class III
WARRANTY	1-year warranty

LED COLOUR	White · Warm white · Natural white · Blue
POWER	3 W
OPERATING VOLTAGE	12 VDC · 24 VDC

CERTIFICATES AND PROPERTIES

- IP67 — IP67
- III — Class III
- U.V. — UV resistant
- Recyclable
- CE
- 1 YEAR WARRANTY — 1 year warranty
- Suitable for direct mounting on normally flammable surfaces
- Dust-tight

FEATURES

Specifications

- AISI 316L Stainless steel
- High light output, long life, low energy consumption
- Special glass and body resistant to UV and impact
- Recyclable Eco-Friendly materials
- No corrosion

TECHNICAL DATA


LIGHT

LED	3 pcs 5730 SMD LED
LED Colour	White, Warm White, Natural White, Blue
Lumen	White LED : 300 lumen Warm White LED : 300 lumen Natural White LED : 300 lumen Blue LED : 180 lumen

ELECTRICAL

Volt	12 VDC or 24 VDC
Watt	3W

DIMENSION DRAWINGS



Dimensions in millimetres (catalogue 2027).

PRODUCT CODES

Code	Power	Luminous flux
AL 3175Y	3 W	300 lm

AK BORU ELK. MALZ. LTD. ŞTİ. · **AKER LIGHTING**
Office: Perpa Ticaret Merkezi A Blok Kat 8 No:702, 34384 Okmeydanı – Şişli / İstanbul
Tel: +90 212 210 25 26

AKBORU
www.akboru.com
info@akboru.com