AKER LIGHTING

TECHNICAL DATA SHEET

AL 4285

IP68 IN-GROUND 6 LED LIGHTING



Garden Lighting › Wallwasher LED Lighting

The AL 4285 is an IP68 in-ground 6 LED light for recessing into the ground to wash walls, façades and trees with light from below. It features an AISI 316L stainless steel frame, a thermal resin cooled body and tempered glass. The 6×1W Power LED version provides 600 lumen at 220 V in white, warm white, blue, green, red or amber, and a 6×3W RGB full colour version operates at 12 V.

PROTECTION RATING	OPERATING VOLTAGE	POWER
IP68	220 V · 12 V · 24 VDC	6–18 W

ELECTRICAL CLASS	WARRANTY
Class I	1-year warranty

LED COLOUR	White · Warm white · Blue · Green · Red · Amber · RGB
POWER	6 W · 18 W
OPERATING VOLTAGE	220 V · 12 V · 24 VDC

CERTIFICATES AND PROPERTIES

- IP68 waterproof
- UV resistant
- Recyclable
- CE
- 1 year warranty
- Class I
- Suitable for direct mounting on normally flammable surfaces
- Dust-tight
- Protected against water jets

FEATURES

Specifications

- AISI 316L Stainless steel frame
- Thermal resin cooled body
- Tempered glass
- RGB full colour
- Underground lighting

TECHNICAL DATA


LIGHT

LED	6×1W Power LED 6×3W RGB
Colour	White, Warm White, Blue, Green, Red, Amber, RGB
Lumen	600 lumen

ELECTRICAL

Volt	220 V · RGB: 12 V 12/24 VDC on request
Watt	6W - 18W (RGB)

DIMENSION DRAWINGS

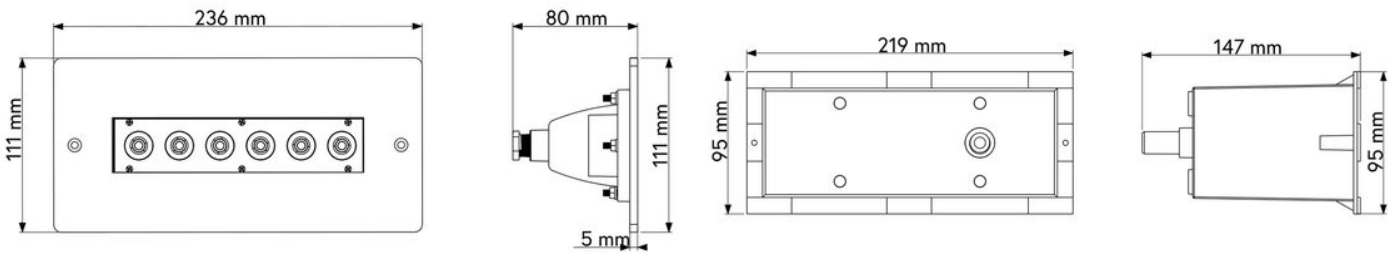

Dimensions in millimetres (catalogue 2027).

AK BORU ELK. MALZ. LTD. ŞTİ. · **AKER LIGHTING**
Office: Perpa Ticaret Merkezi A Blok Kat 8 No:702, 34384 Okmeydanı – Şişli / İstanbul
Tel: +90 212 210 25 26

AKBORU
www.akboru.com
info@akboru.com