


AL UWL302 SM



BOAT SIZE: 7-50 mt. / 25-165 ft.


- The resistant toward salt water thanks to Aluminium Bronze body
- The High-Tech Power Led has high watt. Every LED is 5 Watt
- Every LED has 140-160Lumen
- RGBW full colour LED
- 8 mm Shockproof Tempered Glass
- 2x1,5 mm² Neopren RNF cable.
- Body assembly is practical. 20 mm cable hole is drilled on the surface of the hull and the surface of the boat is mounted underwater.

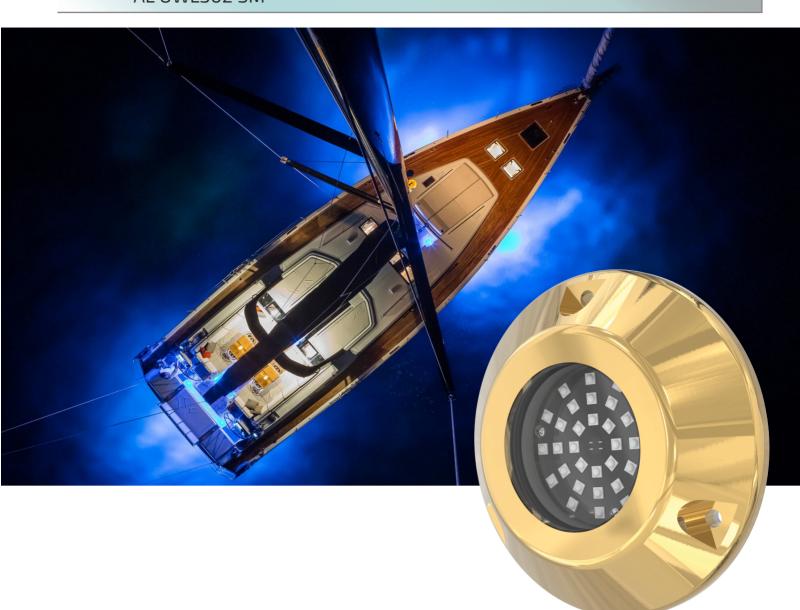





Product Specifications

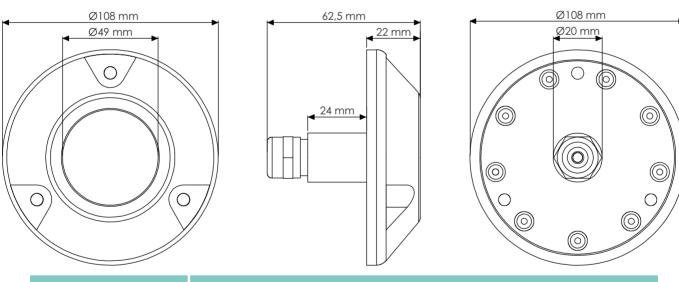

Product Code	AL UWL302 SM
Boat Dimensions mt./ft.	7mt 50mt. / 25ft 165ft.
Single Colour LED	White 32x5W & Royal Blue 32x3W 3535 High Power LED / LED Degree 110°
RGBW Led	RGBW 30x4W 3535 High Power LED / LED Degree 110°
Volt	DC10V-30V
Current 24V / 12V	5.4A / 10.8A
Watt	Single Colour 128W RGBW 120W.
LED Colour / Lumen	White 18000 lumen , Royal Blue 6720 lumen
RGBW Colour / Lumen	R: 1500 lumen, G: 3600 lumen, B: 900 lumen, W: 4500 lumen, RGBW: 10500 lumen
IP Code	IP68 CLASS III
Body Material	Marine Aluminum Bronze Body, AISI 316L Stainless Steel Back Cover
Glass	8 mm. Special Tempered Glass
Product Cable	Single Colour 2 mt. 2x1,5 RNF Marine Cable , RGBW 2 mt. 5x1 RNF Marine Cable
Driver	External Constant Current Led Driver
Underwater Camera	Not applicable.
Product Sizes	Light Head Diameter: 108mm., Head height: 22 mm., Full Length: 62,5 mm., Glass Diameter: 49mm
Hole Diameter	20mm.
Weight	870 gr.

